

# TOPP PRO - KS ARRAY SERIES

**MAXHEB**  
POWER MODULE (Optimum reactance & SPL)

**NEODYMIUM  
ND  
DRIVER**


**Hi-Def**  
SOUND QUALITY

**Rigging  
READY!**

**1600W**  
CE APPROVED  
**129dB!**

2 x 8" Woofers, 2" V.C.

1" Titanium Driver

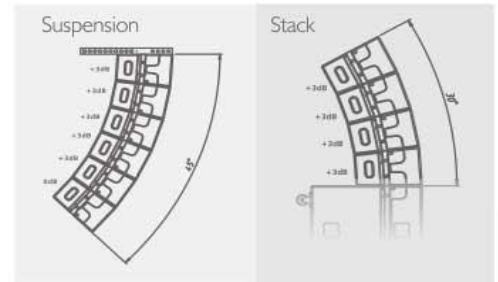

**KS-T28A**

Model	KS-T28A
System Type	2-Way Active Vented Speaker with DSP
Transducer Low	2 x 8" Woofer, 2" Voice Coil
Transducer High	2 x 1" Titanium diaphragm, Neodymium magnet, 1.4" Voice Coil
Coverage Horizontal:	100° nominal, single unit
Coverage Vertical:	7.5° variable with array configuration
Frequency Response (-6dB)	65Hz-20KHz
Crossover Frequency	At 2.0KHz with 24dB filter slope, DSP process
Max SPL	129dB Max.
AMP Power Output	1600W Program, 3200W Peak
Input Connector	Line in - Combo / Link-XLR
Dsp Presets	Flat / HF +3dB / User (Custom Sound)
Line Input	Combo Connector -6dBu
External Controls	Volume Control / Neutrik POWER CON® connector (Grey) offers linking the mains power supply power display with green LED / Clip Limiter with Red LED / IP Control Module (Optional)
Electronic Protections	Thermal / Convection-Fan / Overload / Digital Lim. / Compressor
Power Supply	Neutrik POWER CON® connector, 110-120V / 220-240V~50/60Hz Switchable
Suspension/Mounting:	Integrated hardware for suspension in Line Array, dual pole socket, two handle
Enclosure Construction	18mm calibrated plywood, black painted finish, 1.2T metal grille, power coating finish with internal foam
Dimensions (HxWxD)	271.5 x 692 x 423.5mm (10.7" x 27.25" x 16.7")
Net Weight	29.1kg / 64.15lbs